

Gas Insert Collection

Woodbridge Gas Fireplaces



DVI 750T(E)






Gas Insert Collection

Woodbridge Gas Fireplaces



DVI 750T Gas Insert

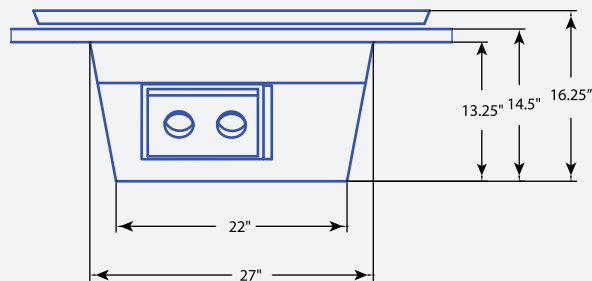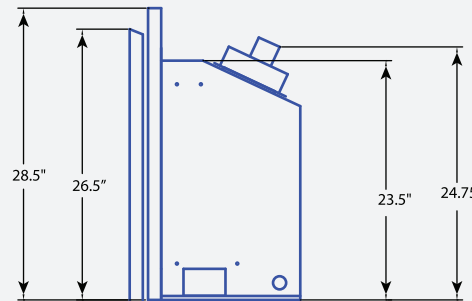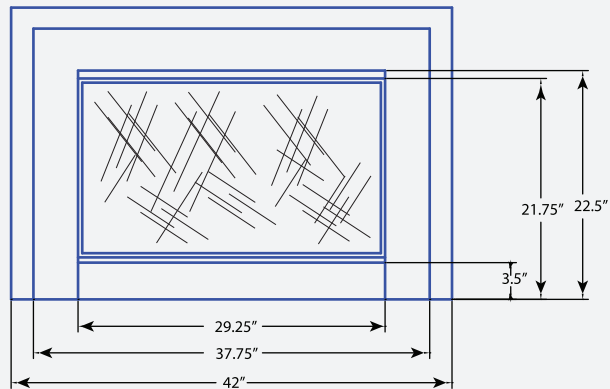

Minimum Fireplace Opening: 27" (W) x 26" (H) x 14" (D)

NOTE: DVI 750T standing pilot version operates without any electrical supply. Blower and Electronic Ignition System require electricity for operation.

SPECIFICATIONS

NATURAL GAS		PROPANE GAS	
Manifold Pressure:(W.C.)	3.5"	Manifold Pressure:(W.C.)	10"
Maximum Supply Pressure	10.5"	Maximum Supply Pressure	13"
Minimum Supply Pressure	4.5"	Minimum Supply Pressure	11"

SPECIFICATIONS	DVI 750TN,P-(E)	
	NATURAL	PROPANE
Max. Btu/hr Input	28,500	28,000
Min. Btu/hr Input	18,000	21,000
Efficiency (Flue Loss)	up to 75%	up to 75%
Energuid e FE rating	62.71% (N) 64.17% (N-E)	65.54% (P) 67.14% (P-E)



Optional 4-sided trim



Optional stainless steel face

Standard features:

- * Traditional style fireplace insert in satin black finish.
- * Safety and convenience of a direct vent gas heater.
- * Durable ceramic glass viewing area.
- * Enamelled reflective panels.
- * Burner and Heavy gauge welded firebox are covered by Lifetime Warranty.
- * Battery powered pilot ignitor and ON/OFF remote control with timer for easy operation.
- * Works without electricity providing heat during power failure.
- * Realistic hand-detailed 7 pc. log set with ember media.
- * Stainless steel flex connector and gas shut-off valve.
- * Variable gas valve control of flame height.
- * 130 C.F.M. thermostat activated blower.
- * Certified safety screen.

Optional features:

- * Natural Gas or Propane/LP model.
- * Touch screen remote control or wall thermostat.
- * Electronic Ignition System with thermostat remote control and flame modulation (DVI750T-E model).
- * 4-sided trim kit.
- * Brushed stainless steel face.



Report # 0401GN010S

